


It's the unique ability to discover and unleash new perspectives by using your knowledge and creativity to challenge conventional thinking.



H O R I Z O N T A L T H I N K I N G

The future starts with a horizontal mindset

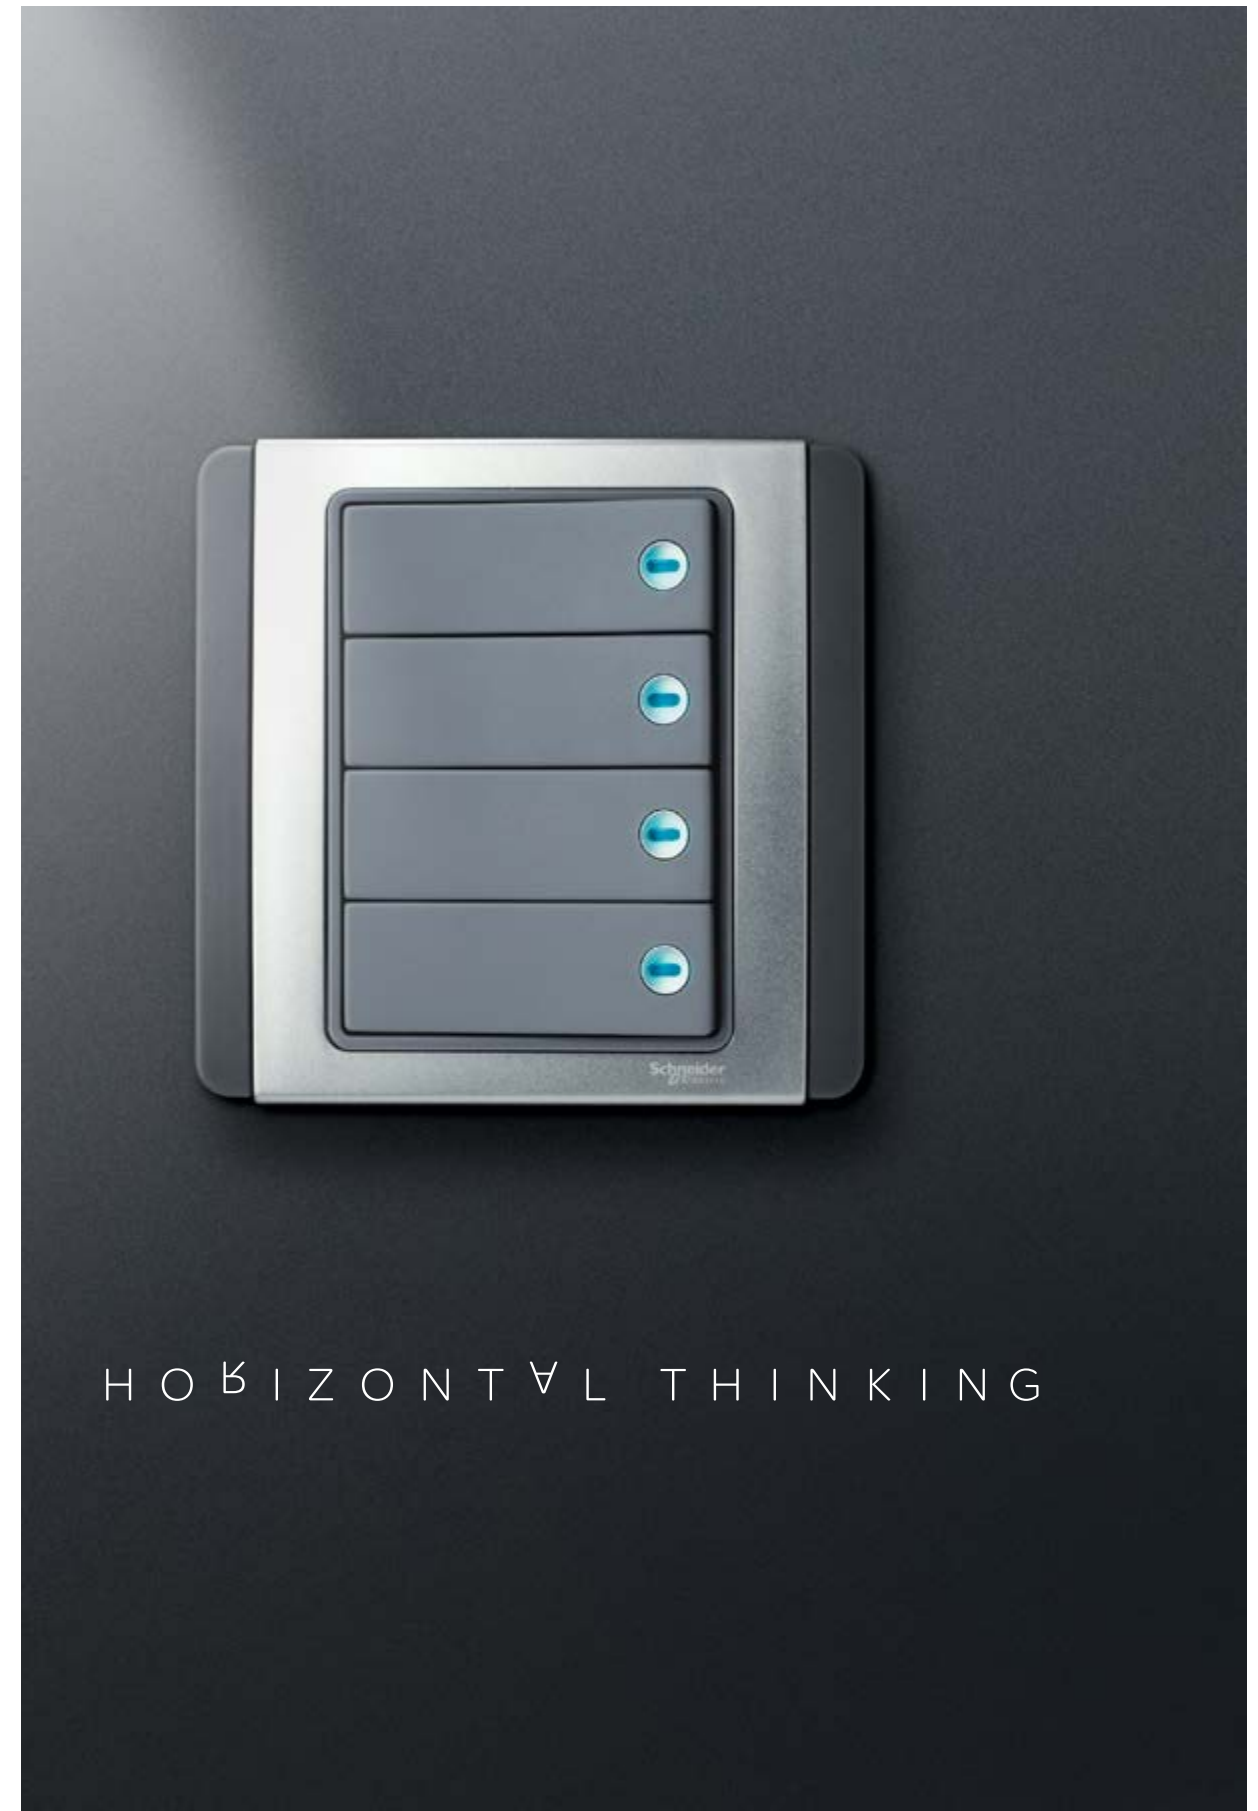

Seeking an optimal blend of form and function?

NEO offers you almost limitless freedom to tailor a system that will satisfy every single one of your unique needs. Extending from basic mechanical NEO C-Metro switches and NEO-X scene control systems to highly sophisticated C-Bus interoperable technologies, NEO's easily mix and matchable configurations, let you master everything from small zones to entire buildings. There's even a range of comprehensive NEO ELV+ extra-low-voltage terminals for demanding hotel designers who wish to transform their guest rooms.

More pleasingly still, all NEO products offer a consistently eye catching design that looks every bit as perfect. Featuring striking, grey-silver or white matte surfaces and glossy surrounds, the end result is a richly textured, multi-dimensional appeal that is sure to enrich even the most stylish modern interior.

NEO C-Bus

Discover the
magic of total
integration



If you love sheer convenience, you're sure to love NEO C-Bus Technology. Enabling the centralised integration and control of virtually any electrical device from any brand in any home, office or hotel, C-Bus' open protocol architecture offers you unprecedented ease, flexibility and interoperability.



Dynamic Labelling Technology™ (DLT)

Offering a choice of editable LCD text or bitmap labels, plus function indicators such as bar-graphs, this keyboardless system greatly simplifies the electronic labeling or re-labeling of switches. With 8 programmable buttons across 2 pages linked via a scroll button, DLT also enables on/off dimming, timing or scene control in up to 8 languages.



The ultimate in Converged Intelligence

Best of all, since you can easily schedule different scene settings 24/7, the system will also slash your energy consumption and fuel bills. A futuristic alternative to conventional wiring, NEO C-Bus will further simplify your life by minimizing cabling and installation times. Easily scalable up or down, this microprocessor-based system even boasts an innovative modular design that lets you upgrade to an interactive remote controlled radio frequency system as your needs become more sophisticated.





Leverage true integral wireless network flexibility

Don't worry about physical barriers like walls and doors! Because all NEO-X switches, dimmers and remote control units use a wireless Radio Frequency network, signal transmissions are no longer limited so anyone with a remote is in control. NEO-X's seamless C-Bus Wireless scalability also ensures you will enjoy still more flexibility in future systems integrations.

NEO-X

Not just atmosphere, ambience

Let there be light!

The more imaginatively you use light, the faster and more dramatically you can transform ordinary spaces into extraordinary ones by enriching and enlivening them with different moods. Eliminating messy and time consuming re-wiring, NEO-X makes such transformations easier than ever before.





An endless array of remote controllers

NEO-X's comprehensive range of stylishly designed FreeLocate and hand-held remote controller ensures you'll also never again have to scramble around in the dark when trying to turn things on.

Easily installable 2-Wire TruRetrofit technology

NEO-X's genuinely groundbreaking 2-Wire TruRetrofit technology means you can also forget all about wiring headaches. As easy to install as a standard switch, NEO-X switches and dimmers require no special training or tools, ensuring standard wallbox upgrades take just minutes.

Programming that's simplicity itself

Just three simple steps is all that's needed to programme in your favourite lighting scenes and begin enjoying instant one-touch control.




NEO C-Metro

Adding
metropolitan chic
to any space



The first mechanical switch to offer LED locators, NEO C-Metro products feature a white or blue LED that gives off a uniquely enticing soft glow that tells you exactly where each switch is located at night.

Revolutionary horizontal dollies round off an outstanding example of cutting edge ingenuity which will always appeal to those wishing to stay ahead of changing trends.

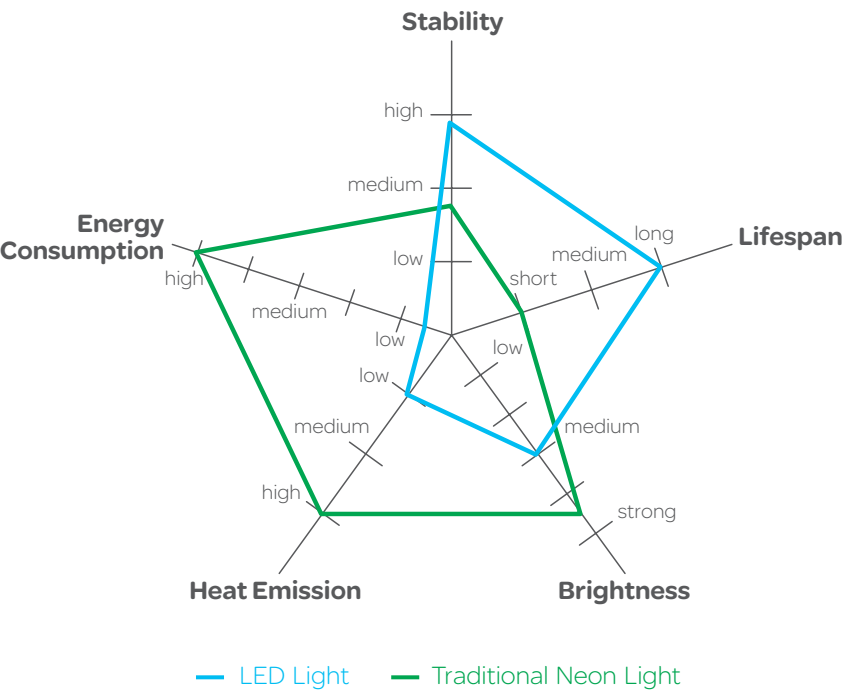

White LED Blue LED

Perfectly complemented by outstanding performance, reliability, lifespan and energy saving characteristics, NEO's subtle glow is the ultimate example of practicality and style in perfect harmony.



The use of fluorescent white-on-white locaters was yet another NEO exclusive. Unobtrusive by day, each indicator shines out with a soft luminescence when it gets dark.




NEO ELV+

Welcome your guests with style and reliability

Hotels are another area where NEO is setting new benchmarks for simplicity and style. Incorporating integrated RJ45 sockets, the NEO ELV+ range of extra-low-voltage control wallplates is fully compatible with all state-of-the-art centralised hotel guest room control systems. There really is no easier way to resolve long-standing reliability issues caused by compatibility problems between data cables and conventional 240V terminals. In addition to more reliable performance and a significant reduction of data losses, NEO ELV+ will further add to your bottom line by measurably cutting installation times.

Easily combinable with other switches, sockets and accessories in the NEO range, NEO ELV+ is the only currently available hotel management system connection which won't compromise your guest rooms with sockets in different designs.






Loose-jointed termination of data cable with conventional 240V switch

Such non-professional yet common practice as connecting data cable to conventional 240V terminal will lead to unreliable performance due to loose-jointed termination.



Secure RJ45 termination of data cable with NEO ELV+ control wallplate

NEO ELV+, Schneider's industry-first integrated RJ45 control wallplate, enables a direct and uninterrupted connection. It helps eliminate data loss, reduce installation time and material cost and at the same time, ensure more reliable performance.

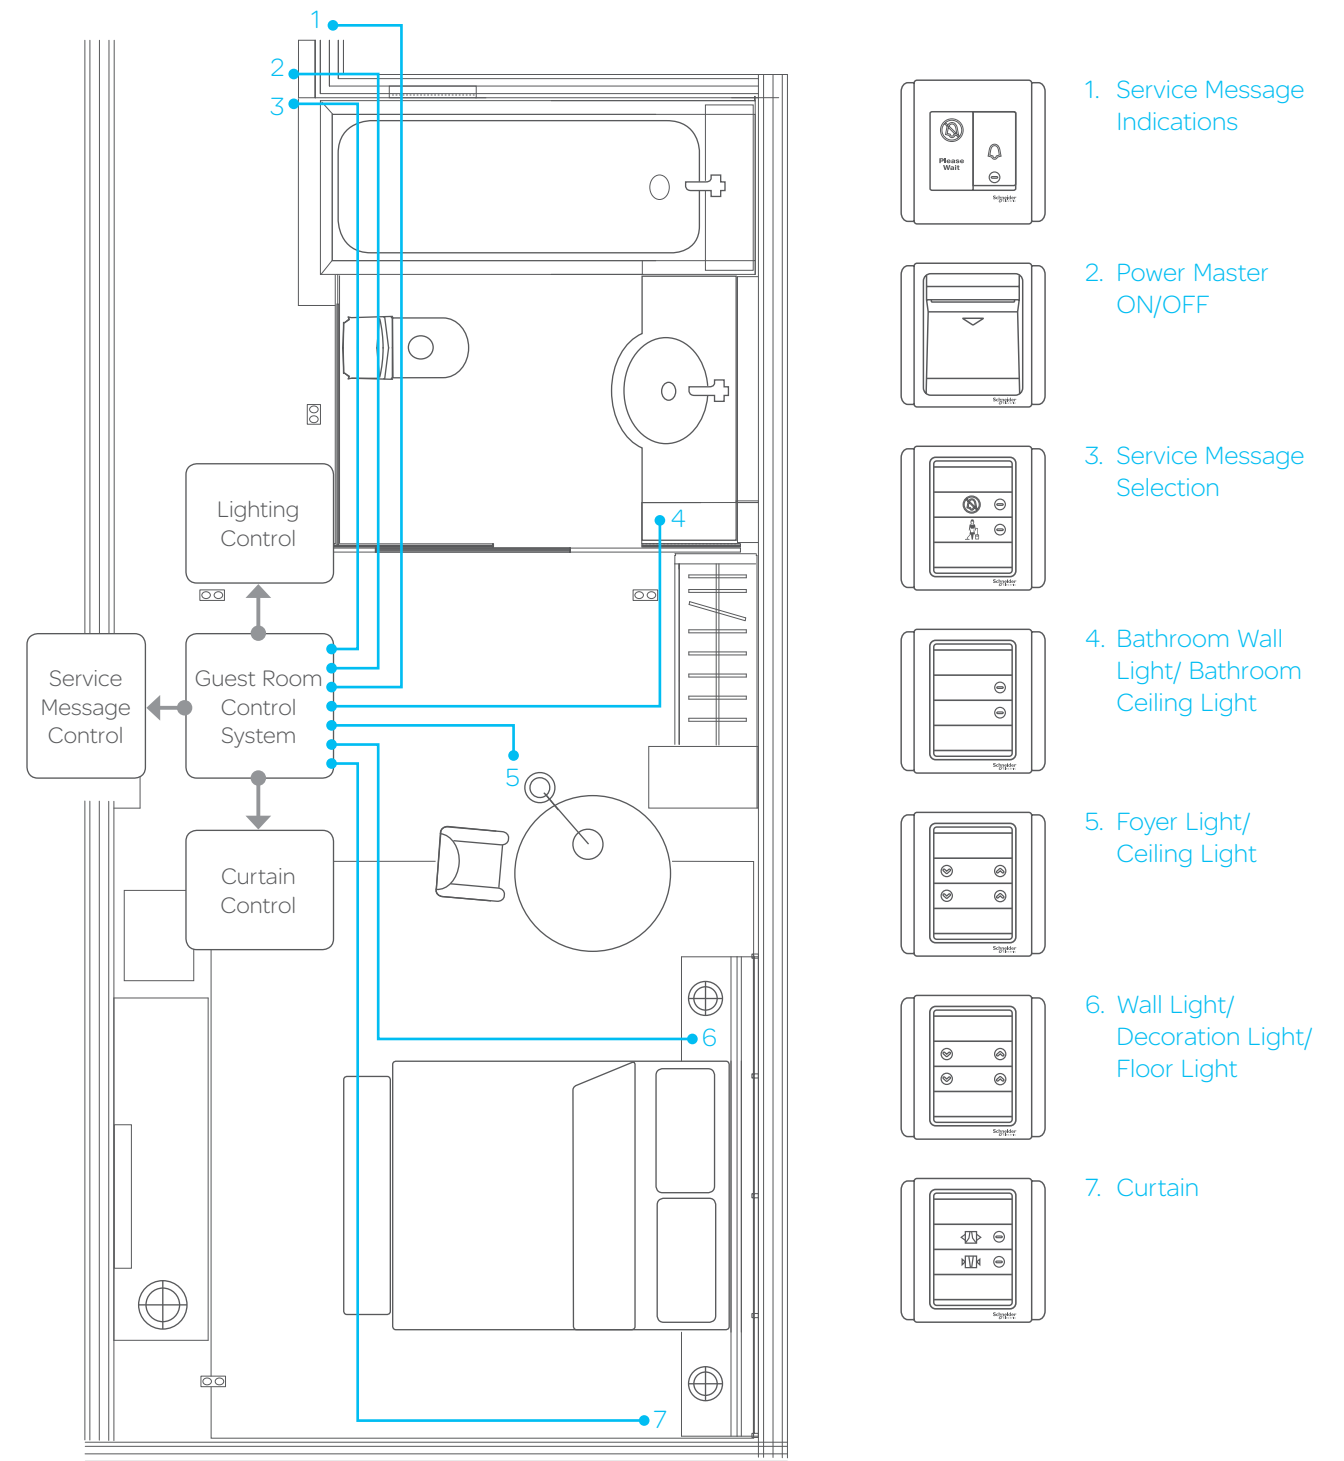

Quality in every sense

When you choose NEO, you can be sure of a level of quality and safety that is simply second to none. With its doubly thick, oval mounting holes, NEO greatly simplifies adjusting levels and minimizes the risk of potential damage during installation. Bulletproof material faceplates which are less flammable, more shock resistant and offer outstanding insulation are another way NEO will add to your peace of mind. And don't worry about your NEO products' good looks fading over time. All spray-painted parts are protected by polyurethane coating to ensure the switch surrounds will always stay factory-fresh.

Safety is another area where NEO's designers have taken the utmost care. Smooth, silver spot-welded contacts and silver-brass alloy bridges coupled with a robust, high-speed spring puncher minimize arc formation. Additional safety features include reinforced-nylon protective shutters to prevent shocks caused by the accidental insertion of conductive objects plus seamless conductor bridges that significantly reduce heat generation.



Aesthetic consistency everywhere you look

The NEO range's unparalleled aesthetic consistency ensures discerning interior designers will always be able to maximize their creative flair in achieving metropolitan chic. NEO C-Bus', NEO-X's, NEO C-Metro's and NEO ELV+'s pleasing, unified look ensures the easy mixing and matching of ALL components. This consistency even extends to datacommunications terminals. Where other brands fail to pay attention to aesthetics, our datacommunications terminals display the same design look and feel as NEO. It all adds up to by far the most stylish way to enjoy a modern digital lifestyle.



AEEMA Intelligent Architecture
(2002)



Smarthouse Best Buy Award
(2004)



Best Custom Installation Product of The Year
(2005)



Custom Retailer EXCITE Award
(2008)



Electronic House Product of the Year Award
(2008)



Innovative Housing Technology Awards
(2008)

NEO Family Architecture

Interoperable

NEO C-Bus Wireless



Remote Controller



2 Key Input
1 Channel Output



4 Key Input
1 Channel Output



8 Key Input
2 Channel Output

NEO C-Bus Wired



Touch Screen Panel



Key Input
4 Gang LCD



Key Input
2 Gang Switch



Key Input
4 Gang Switch



Key Input
8 Gang Switch

Lighting Control

NEO-X



Remote Controller



Switch Control



Dimming Control



1 Key
FreeLocate



4 Key
FreeLocate

Electro-Mechanical

NEO C-Metro

Switches



1 Gang Switch



2 Gang Switch



4 Gang Switch



Dimmer Switch



Double Pole Switch

Sockets



Socket



Switched Socket



TV-FM
Socket Outlet



Fused
Connection Unit



International
Socket

Extra-Low-Voltage

NEO ELV+



Switch Control



Dimming Control



Curtain Control



Master Power Control



Courtesy Control

Back-end System

C-Bus Wireless System



Security System



MinderPRO Controller



Keypad



Expansion Panel,
Slave



Communication
Interface - C-Bus
or EZInstall

C-Bus System - Lighting Control & Home Entertainment

Input Unit



General
Input Unit



Auxiliary
Input



Bus
Coupler



Motion
Sensor



Multi
Sensor



Light Level
Sensor

Output Unit



Architecture
Dimmers



Professional
Dimmers



4,8,12 Channel
Relay Units



4 Channel
Change Over
Relay Unit



2 Channel DALI
Gateway



Channel DSI
Gateway



Infrared
Output Unit

System Unit



Network
Bridge



Power
Supply



PC
Interface



Network
Interface

System Control Software



C-Bus
Schedule Plus V.4



HomeGate
Software V.4

Integration Unit



OPC
Server



BACnet
Gateway

Multi-room Audio



Audio Matrix
Switcher



Audio
Distributor




Audio
Amplifier

Any Hotel Management System

Interoperable across all systems

Structured cabling products to complete the total NEO range offer

Actassi



Patch Panel



LAN Controller



Tabletop
Patch Hub



Desktop
Patch Caddy



Deskmount
Flexiport





























Flexiport
Wallplate

Delta



VDI Box

	Product Description	Packing	White color	Grey silver color
Switches, IEC 60669-1				
 E3031H1 EBGS	10A 1 Gang 1 Way Switch W. Led	8/80	E3031H1_EWWW_G19	E3031H1_EBGS_G19
	 E3032H1 EWWW	8/80	E3032H1_EWWW_G19	E3032H1_EBGS_G19
 E3033H1 EBGS	10A 3 Gang 1 Way Switch W. Led	8/80	E3033H1_EWWW_G19	E3033H1_EBGS_G19
	 E3034H1 EWWW	8/80	E3034H1_EWWW_G19	E3034H1_EBGS_G19
 E3033H2 EBGS	10A 4 Gang 1 Way Switch W. Led	8/80	E3033H2_EWWW_G19	E3033H2_EBGS_G19
	 E3034H2 EWWW	8/80	E3034H2_EWWW_G19	E3034H2_EBGS_G19
 E3031HBP GS	10A 1 Gang 2 Way Switch W. Led	8/80	E3031H2_EWWW_G19	E3031H2_EBGS_G19
	10A 2 Gang 2 Way Switch W. Led	8/80	E3032H2_EWWW_G19	E3032H2_EBGS_G19
	10A 3 Gang 2 Way Switch W. Led	8/80	E3033H2_EWWW_G19	E3033H2_EBGS_G19
	10A 4 Gang 2 Way Switch W. Led	8/80	E3034H2_EWWW_G19	E3034H2_EBGS_G19
	16A Intermediate Switch, Horizontal	8/80	E3031HIA_EWWW_G19	E3031HIA_EBGS_G19
	4Ax Bell Press Switch Horizontal	8/80	E3031HBP_WW_G19	E3031HBP_GS_G19
Double Pole Switches, IEC 60669-1				
 E3031HD20 EWWW	20A Double Pole Switch W. Led	8/80	E3031HD20_EWWW_G19	E3031HD20_EBGS_G19
	 E3031HD20 EBGS	10/100	E3031DR32_WW	E3031DR32_GS
 E3031DR45 WW	32A Double Pole Switch	10/100	E3031DR32_EWWW	E3031DR32_EBGS
	 E3031DR45 EBGS	10/100	E3031DR45_WW	E3031DR45_GS
	45A Double Pole Switch	10/100	E3031DR45_EWWW	E3031DR45_EBGS
	45A Double Pole Switch W. Led	10/100		
Dimmer, IEC 60669-2-1				
 E3031HD EWWW	600W 1 gang dimmer w. Led	8/80	E3031HD_EWWW	E3031HD_EBGS
	 E3031HD EBGS	8/80	E3032HD_EWWW	E3032HD_EBGS
 E3032HD EWWW	600W 2 gang dimmer w. Led			
	 E3032HD EBGS			

	Product Description	Packing	White color	Grey silver color
Socket Outlets, IEC 608 84				
 E3426US WW	10A 2 Pin Single Socket	8/80	E3426US_WW_G19	E3426US_GS_G19
	 E3426US2 GS	8/80	E3015US_WW_G19	E3015US_GS_G19
 E3015US WW	10A 2 Pin Switched Socket	8/80	E3426US2_WW_G19	E3426US2_GS_G19
	 E3426 10IS GS	8/80	E3426UESTR_WW_G19	E3426UESTR_GS_G19
 E3426UESTR WW	16A 3 Pin Single Socket	10/100	E3426UEST2RWW_G19	E3426UEST2RGS_G19
	 E3426UEST2RGS	6/60	E3426_10IS_WW_G19	E3426_10IS_GS_G19
	16A 3 Pin Duplex Socket	8/80		
	10A International Socket	8/80		
British Socket Outlet, BS 1363-2				
 E3426 GS	13A, 3 Pin Socket	8/80	E3426_WW_G19	E3426_GS_G19
	 ET3426 WW	6/60	E3015_WW_G19	E3015_GS_G19
 E3015 WW	13A, 3 Pin Twin Socket	8/80	E3015D_EWWW_G19	E3015D_EBGS_G19
	 ET3025 GS	5/50	ET3025_WW	ET3025_GS
 E3015D EBGS	13A, 3 Pin Switched Socket W. Led	8/80	ET3025D_EWWW	ET3025D_EBGS
	 ET3025D EWWW	5/50	E3426_16SS_WW_G19	E3426_16SS_GS_G19
	13A, 3 Pin Twin Switched Socket W. Led	10/200		
	16A Schuko Socket			

	Product Description	Packing	White color	Grey silver color
Telecommunication Outlets, BS3041 / BS5733				
 E3031TV GS	1 Gang Tv Outlet	8/80	E3031TV_WW_G19	E3031TV_GS_G19
 E3032VTV WW	2 Gang Tv Outlet	20/100	E3032VTV_WW_G19	E3032VTV_GS_G19
	1 Gang F-Connection Tv	8/80	E3031TVF_WW	E3031TVF_GS
 E3031TVF WW	Tv & Fm W. 2 Cord Grips	8/80	E3032VTVFM_2_WW	E3032VTVFM_2_GS
 E3032VTVFM 2 GS	1 Gang Tel Outlet W. Shutter	8/80	E3031RJ_WW_G19	E3031RJ_GS_G19
	2 Gang Tel Outlet W. Shutter	8/80	E3032RJ_WW_G19	E3032RJ_GS_G19
 E3031RJ GS	1 Gang Data Outlet, Cat5e, W. Shutter	8/80	E3031RJ5E_WW_G19	E3031RJ5E_GS_G19
 E3032RJ WW	2 Gang 8 Pin Data Outlet, Cat5e, W. Shutter	8/80	E3032RJ5E_WW_G19	E3032RJ5E_GS_G19
 E3031RJ5E WW	Tel Outlet + Data Cat5e Outlet W. Shutter	8/80	E3032TD_WW_G19	E3032TD_GS_G19
 E3032RJ5E GS				
 E3032TD GS				
Connection Unit, BS 5733				
 E3031TB GS	25A Connection Unit	8/80	E3031TB_WW_G19	E3031TB_GS_G19
	13A Fused Connection Unit	10/100	E3030FSG_WW_G19	E3030FSG_GS_G19
	13A Fused Connection Unit W. Led	10/100	E3030FSG_EWWW_G19	E3030FSG_EBGS_G19
 E3030FSG WW	13A Fused Connection Unit W. Double Pole Switch	10/100	E3031DFSG_WW_G19	E3031DFSG_GS_G19
 E3030FSG GS	13A Fused Connection Unit W. Double Pole Switch & Led	10/100	E3031DFSG_EWWW_G19	E3031DFSG_EBGS_G19
 E3031DFSG EWWW				
 E3031DFSG GS				

	Product Description	Packing	White color	Grey silver color
Hotel Series, IEC 60669-1 / IEC 61558-2-5				
 E3031EKTH WW	115_240V Shaver Units, Vertical	1/20	ET3727V_WW	ET3727V_GS
	Electronic Key Card Switch (Credit Card Size)	6/60	E3031EKTH_WW	E3031EKTH_GS
 ET3727V GS	4A Bell switch with PCU & DND symbols	8/80	E3031VBPDM_WW_G19	E3031VBPDM_GS_G19
 E3031VBPDM WW	Twin Gang, Message Indicator W. Illuminated Dnd_pcu Symbol	8/80	E3032HDM_WW_G19	E3032HDM_GS_G19
 E3032HDM GS				
ACCESSORIES				
 E3030X WW	1 Gang Blank Plate	15/150	E3030X_WW_G19	E3030X_GS_G19
 ET3030X GS	2 Gang Blank Plate	10/100	ET3030X_WW_G19	ET3030X_GS_G19
 E257DBE_C5	1G Wall Box	200	E257DBE_C5	E257DBE_C5
	2G Wall Box	56	ET257DBE_C5	ET257DBE_C5
 ET257DBE_C5	Wp 1G Box For Socket, Ip55	1/30	E223R_TR	E223R_TR
 ET223R_TR	Wp Twin Gang Box For Socket, Ip55	1/20	ET223R_TR	ET223R_TR
	Wp 1G Box For Switch, Ip55	12/120	E223M_TR	E223M_TR
 E223M_TR				

	Product Description	Product Number	
Wireless Relay Output			
<div> E5852R8F1EC GB E5852R8F1AA GB</div> <div> E5854R8F1EC GB E5854R4F2EC GB E5854R8F1AA GB E5854R4F2AA GB</div> <div> E5858R8F1EC GB E5858R4F2EC GB E5858R8F1AA GB E5858R4F2AA GB</div>	Key Input 2 Gang, 1 Channel Relay, 1 x 8A	315MHz E5852R8F1EC*	434MHz E5852R8F1AA*
	Key Input 4 Gang, 1 Channel Relay, 1 x 8A	E5854R8F1EC*	E5854R8F1AA*
	Key Input 8 Gang, 1 Channel Relay, 1 x 8A	E5858R8F1EC*	E5858R8F1AA*
	Key Input 4 Gang, 2 Channel Relay, 2 x 4A	E5854R4F2EC*	E5854R4F2AA*
	Key Input 8 Gang, 2 Channel Relay, 2 x 4A	E5858R4F2EC*	E5858R4F2AA*
Wireless Trailing Edge Dimmers			
<div> E5852D2T1EC GB E5852D2T1AA GB</div> <div> E5854D2T1EC GB E5854D1T2EC GB E5854D2T1AA GB E5854D1T2AA GB</div> <div> E5858D2T1EC GB E5858D1T2EC GB E5858D2T1AA GB E5858D1T2AA GB</div>	Key Input 2 Gang, 1 Channel Trailing Edge Dimmer, 1 x 2A	315MHz E5852D2T1EC*	434MHz E5852D2T1AA*
	Key Input 4 Gang, 1 Channel Trailing Edge Dimmer, 1 x 2A	E5854D2T1EC*	E5854D2T1AA*
	Key Input 8 Gang, 1 Channel Trailing Edge Dimmer, 1 x 2A	E5858D2T1EC*	E5858D2T1AA*
	Key Input 4 Gang, 2 Channel Trailing Edge Dimmer, 2 x 1A	E5854D1T2EC*	E5854D1T2AA*
	Key Input 8 Gang, 2 Channel Trailing Edge Dimmer, 2 x 1A	E5858D1T2EC*	E5858D1T2AA*
Wireless Leading Edge Dimmers			
<div> E5852D2L1EC GB E5852D2L1AA GB</div> <div> E5854D2L1EC GB E5854D1L2EC GB E5854D2L1AA GB E5854D1L2AA GB</div> <div> E5858D2L1EC GB E5858D1L2EC GB E5858D2L1AA GB E5858D1L2AA GB</div>	Key Input 2 Gang, 1 Channel Leading Edge Dimmer, 1 x 2A	315MHz E5852D2L1EC*	434MHz E5852D2L1AA*
	Key Input 4 Gang, 1 Channel Leading Edge Dimmer, 1 x 2A	E5854D2L1EC*	E5854D2L1AA*
	Key Input 8 Gang, 1 Channel Leading Edge Dimmer, 1 x 2A	E5858D2L1EC*	E5858D2L1AA*
	Key Input 4 Gang, 2 Channel Leading Edge Dimmer, 2 x 1A	E5854D1L2EC*	E5854D1L2AA*
	Key Input 8 Gang, 2 Channel Leading Edge Dimmer, 2 x 1A	E5858D1L2EC*	E5858D1L2AA*

	Product Description	Product Number	
Wireless Remote Controller			
<div> 5888TXBC GB 5888TXBA GB</div>	Remote Controller, 8 Button	315MHz 5888TXBC GB	434MHz 5888TXBA GB
Key Input Units			
<div><div> E5054DL GB</div><div> E5052NL GB</div><div> E5054NL GB</div><div> E5058NL GB</div></div>	Key Input 2 Gang Key Input 4 Gang Key Input 8 Gang Key Input 4 Gang, LCD, Grey and Brushed Aluminium		E5052NL* E5054NL* E5058NL* E5054DL GB
Touch Screen Panel			
<div><div> 5050CTC2,GB</div><div> 5050CT2,GB</div></div>	NEO Fascia, Grey and Brushed Aluminium NEO Fascia, White NEO Fascia, Black NEO Fascia, White and Brushed Aluminium	Colour Screen 5050CTC2,GB 5050CTC2,WE 5050CTC2,BK 5050CTC2-28	Black & White Screen 5050CT2,GB 5050CT2,WE 5050CT2,BK 5050CT2-28



	Product Description	Product Number	
Switches			
<div> E3851R8F1EC WE</div> <div> E3852R4F2EC WE</div> <div> E3851R8F1EC GB</div> <div> E3852R4F2EC GB</div> <div> E3851R8F1EA GB</div> <div> E3852R4F2EA GB</div>	NEO-X, 1 Gang, Relay Switch 2000VA, Grey NEO-X, 2 Gang, Relay Switch 2 x 1000VA, Grey NEO-X, 1 Gang, Relay Switch 2000VA, White NEO-X, 2 Gang, Relay Switch 2 x 1000VA, White	315MHz E3851R8F1EC GB E3852R4F2EC GB E3851R8F1EC WE E3852R4F2EC WE	434MHz E3851R8F1EA GB E3852R4F2EA GB E3851R8F1EA WE E3852R4F2EA WE
Dimmers			
<div> E3852D2L1EC WE</div> <div> E3854D1L2EC WE</div> <div> E3852D2L1EC GB</div> <div> E3854D1L2EC GB</div> <div> E3852D2L1EA GB</div> <div> E3854D1L2EA GB</div>	NEO-X, 1 Gang, Leading Edge Dimmer, 500VA, Grey NEO-X, 2 Gang, Leading Edge Dimmer, 2 x 250VA, Grey NEO-X, 1 Gang, Leading Edge Dimmer, 500VA, White NEO-X, 2 Gang, Leading Edge Dimmer, 2 x 250VA, White	315MHz E3852D2L1EC GB E3854D1L2EC GB E3852D2L1EC WE E3854D1L2EC WE	434MHz E3852D2L1EA GB E3854D1L2EA GB E3852D2L1EA WE E3854D1L2EA WE
Hand-Held Remote Controller Unit			
<div> 3855TXBC GB 3855TXBA GB</div>	NEO-X, Hand-Held Remote Controller Unit	315MHz 3855TXBC GB	434MHz 3855TXBA GB
FreeLocate Switches			
<div> E3851WTXBC WE</div> <div> E3854WTXBC WE</div> <div> E3851WTXBC GB</div> <div> E3854WTXBC GB</div> <div> E3851WTXBA GB</div> <div> E3854WTXBA GB</div>	NEO-X, Wireless, FreeLocate Switch Control Unit, 1 Key, Grey NEO-X, Wireless, FreeLocate Switch Control Unit, 4 Key, Grey NEO-X, Wireless, FreeLocate Switch Control Unit, 1 Key, White NEO-X, Wireless, FreeLocate Switch Control Unit, 4 Key, White	315MHz E3851WTXBC GB E3854WTXBC GB E3851WTXBC WE E3854WTXBC WE	434MHz E3851WTXBA GB E3854WTXBA GB E3851WTXBA WE E3854WTXBA WE



	Product Description	Product Number
Switching Control Wall		
 E3031LV EAGS	1 Gang Switching Control Wallplate with Amber LED	E3031LV EAGS
	2 Gang Switching Control Wallplate with Amber LED	E3032LV EAGS
 E3033LV EAGS	3 Gang Switching Control Wallplate with Amber LED	E3033LV EAGS
Dimming Control Wallplates		
 E3031DLV EAGS	1 Gang Dimming Control Wallplate with Amber LED	E3031DLV EAGS
	2 Gang Dimming Control Wallplate with Amber LED	E3032DLV EAGS
 E3032DLV EAGS		
Curtain Control Wallplates		
 E3031CLV GS	1 Gang Curtain Control Wallplate	E3031CLV GS
	2 Gang Curtain Control Wallplate	E3032CLV GS
 E3032CLV GS		
Master Power Control Wallplate		
 E3031EKTHLV EAGS	Master Power Control Wallplate with Amber LED	E3031EKTHLV EAGS
Bell Switch with Courtesy Indicators		
 E3031DMBLV EGGS	Bell Switch with “Do Not Disturb / Make Up Room” Indicators	E3031DMBLV EGGS
	Bell Switch with “Do Not Disturb / Make Up Room / Please Wait” Indicators	E3031DMBWLVLV EGGS
 E3031DMBWLVLV EGGS		
Courtesy Control Wallplates		
 E3031WLVLV EAGS	“Butler Call / Do Not Disturb / Make Up Room” Control Wallplate	E3033DMBLV EAGS
	“Do Not Disturb / Make Up Room” Control Wallplate	E3032DMLV EAGS
 E3033DMBLV EAGS	“Please Wait” Control Wallplate	E3031WLVLV EAGS



neo[®]
face the future

Concepts rearranged.
Space renewed.

About Schneider Electric

As the global specialist in energy management with operations in more than 100 countries, Schneider Electric offers integrated solutions across multiple market segments, including leadership positions in energy and infrastructure, industrial processes, building automation, and data centres/networks, as well as a broad presence in residential applications. Focused on making energy safe, reliable, and efficient, the company's 100,000+ employees achieved sales of more than 15.8 billion euros in 2009, through an active commitment to help individuals and organisations "Make the most of their energy".

The Installation Systems & Control Division of Schneider Electric provides solutions that represent the best in lifestyle and innovation for offices, hotels and homes. These solutions include award-winning products in the areas of building and home automation, structured cabling, and designer switches and sockets. They help the finest architectures around the world to achieve more with less.

www.schneider-electric.com



All rights reserved by Schneider Electric.

SE022-0309-20

Liên hệ

Dịch vụ hỗ trợ: 1800-585858 (Miễn phí cuộc gọi)

Fax: (08) 38 120 477

Email: customercare.vn@schneider-electric.com

Website: www.schneider-electric.com.vn

Facebook: www.facebook.com/SchneiderElectricVN

Hà Nội

Lầu 8, Tòa nhà Vinacotex

34 Láng Hạ, Quận Ba Đình

ĐT : (04) 3831 4037

Fax: (04) 3831 4039

Đà Nẵng

Phòng D, Lầu 6, Tòa nhà ACB

218 Bạch Đằng, Quận Hải Châu

ĐT : (0511) 387 2491

Fax: (0511) 387 2504

Hồ Chí Minh

Phòng 7.2, Lầu 7, Tòa nhà E-Town

364 Cộng Hòa, Quận Tân Bình

ĐT : (08) 3810 3103

Fax: (08) 3812 0477

